




450 SERIES HEAVY DUTY POWER RELAY



- UL Standard 60947-1 (UL 508) Qualified
- Standard Base with DIN Rail and Panel Mount Option
- 10,000,000 Cycles Mechanical and 100,000 Cycles Electrical
- Optional LED - Coil Power Indication
- Optional Polycarbonate Protective Cover
- Class F (155°C) Insulation System
- Max.UL Rating: 40 Amps or 50 Amps
 - 40 Amps @ 240 VAC - 50 Amps @ 240VAC
 - 40 Amps @ 28 VDC - 50 Amps @ 28VDC

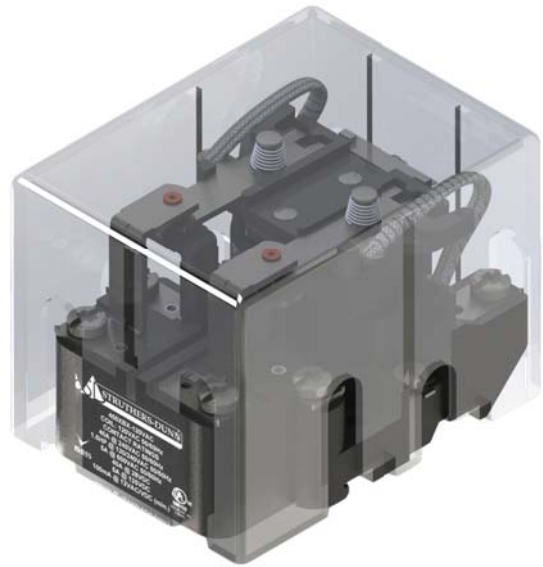

GENERAL CHARACTERISTICS

Insulation System	Class F (155°C)
Mechanical Life	10,000,000 operations
Electrical Life	100,000 operations
Operate Time	20ms
Release Time	15ms
Dielectric	Between coil and contact 2200VAC
	Between poles 2200VAC
	Between contacts 1500VAC
Ambient Temperature	AC Coil -30°C to 55°C
	DC Coil -30°C to 55°C
Connection	6-32 coil terminal screws 8-32 contact terminal screws (Listed wire connectors required for UL Listed Installations)
Weight	227-311 g
Certifications:	UL/CUL Listed, UL/CUL Recognized

INPUT CHARACTERISTICS

Rated Voltage	6, 12, 24, 120, 208, 220, 240, 277, 480VAC 6, 12, 24, 48, 110/125, 250VDC
Operating Range	AC: 85% to 110% of Rated Voltage DC: 80% to 110% of Rated Voltage
Dropout Voltage	10% of Rated Voltage
Insulation Resistance	1000 MΩ @ 500VDC

COIL CHARACTERISTICS

Nominal Voltage	Power Consumption	Coil Resistance
6 VAC	~10VA	0.85Ω
12VAC		3.2 Ω
24VAC		12Ω
120VAC		290Ω
208VAC		850Ω
220VAC		1040Ω
240VAC		1200Ω
277VAC		1500Ω
480VAC		4500Ω
6VDC	~2W	18Ω
12VDC		70Ω
24VDC		290Ω
48VDC		1200Ω
110/125VDC		6000Ω
250VDC		34000Ω

CONTACT CHARACTERISTICS

Configurations	XAX (SPDT) (1 Form C); XBX (DPDT) (2 Form C); BXX (DPST) (2 Form A); HXX (SPST-NO-DM) (Form X); XXH (SPST-NC-DB) (Form Y); XHX (SPDT-DM-DB) (Form Z)	
Contact Material:	AgSnO2 - Silver Tin Oxide	
UL CONTACT RATINGS		
	40A	50A
AC Rating:	40A @ 240VAC 50/60Hz 5A @ 600VAC 50/60Hz	50A @ 240VAC 50/60Hz 10A @ 600VAC 50/60Hz
Motor Load Rating:	1.5HP @ 120/240VAC 50/60Hz	2HP @ 120VAC 50/60Hz 1.5HP @ 240VAC 50/60Hz
DC Rating (With Blowout Magnet):	40A @ 28VDC 5A @ 125VDC	50A @ 28VDC 10A @ 125VDC
Auxiliary Switch Rating:	10A @ 125/250VAC	10A @ 125/250VAC
ADDITIONAL CONTACT RATINGS		
Pilot Duty:	A300	A300
AC RATING	30A @ 120VAC (Ballast) 15A @ 240VAC (Ballast) 20A @ 600VAC 40A @ 277VAC	N/A
DC Rating (With Blowout Magnet):	20A @ 125VDC 4A @ 250VDC	20A @ 125VDC 4A @ 250VDC
Minimum Load Rating:	100mA @ 12 VAC/DC (min.)	100mA @ 12 VAC/DC (min.)

*Additional Coil Voltages Available Upon Request

STRUTHERS-DUNN

www.struthers-dunn.com

407 E. Smith Street - Suite B • Timmonsville, SC 29161 • Phone: (843) 346-4427 • Fax: (843) 346-4465 • Email: info@struthers-dunn.com





450 SERIES HEAVY DUTY POWER RELAY

SPECIAL FEATURES

*Optional Auxiliary Switch - (Code "90")
*Dual Auxiliary Switch Available - (Code "91")

Optional Coil Suppression Diode - (Code "V")
(DC Version Only)

Optional Polycarbonate
Protective Cover - (Code "C")

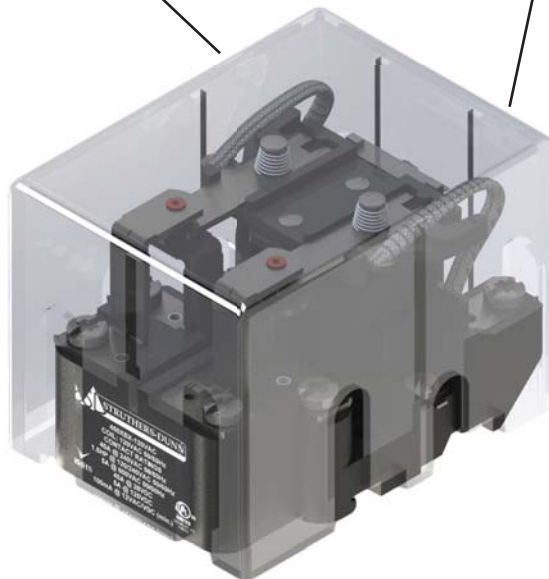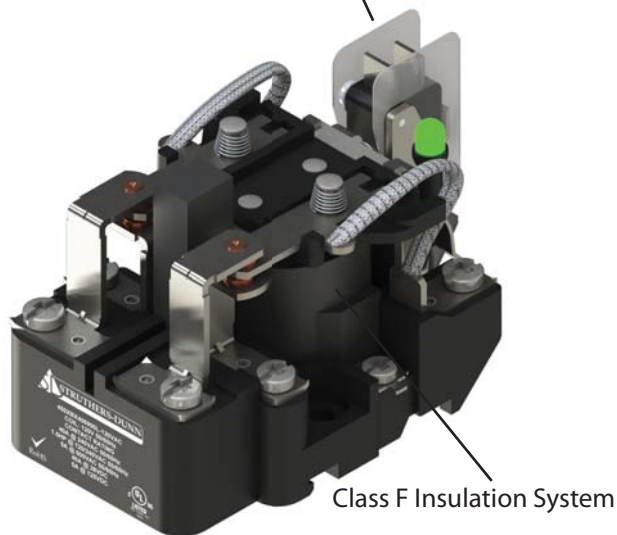


Optional Blowout Magnet - (Code "69")
(Not Available with XXH Contact Combination)

Optional Green
LED Indicator - (Code "L")

*Optional Quick Connect
Terminals - (Code "Q")

Standard Din Rail
& Panel Mount Combination







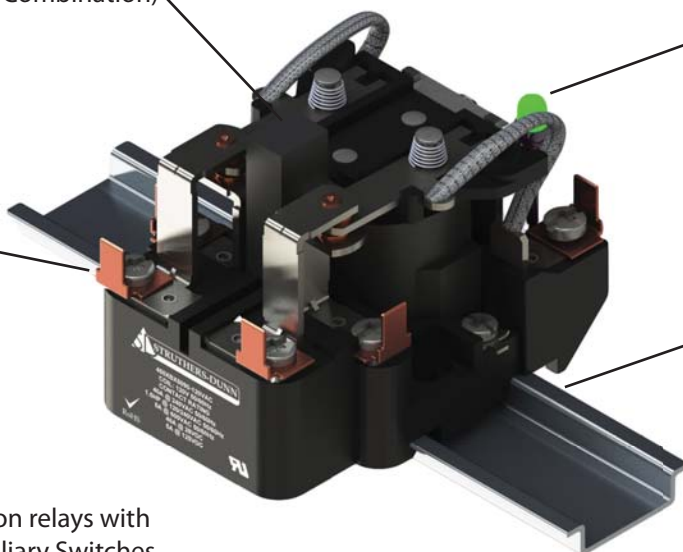


*Note: Covers can not be used on relays with
Quick Connect Terminals or Auxiliary Switches



450 SERIES HEAVY DUTY POWER RELAY

WIRING DIAGRAMS -SEE PAGES 4 AND 5 FOR TERMINAL LOCATIONS

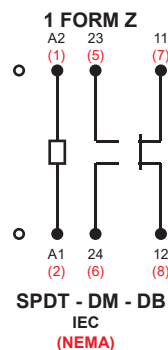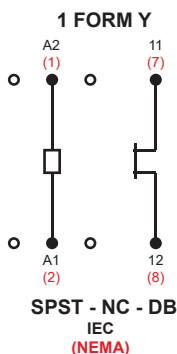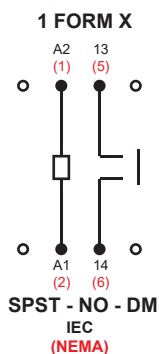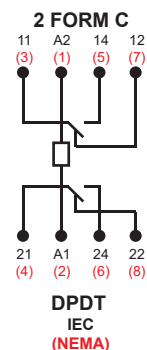

PART NUMBERING INFORMATION

Series Part Number Contact Combination: - XAX (SPDT) (1 Form C) - XBX (DPDT) (2 Form C) - BXX (DPST) (2 Form A) - HXX (SPST- NO-DM) (1 Form X) - XXH (SPST- NC-DB) (1 Form Y) - XHX (SPDT - DM-DB) (1 Form Z) Contact Type : 40 Amp Silver Alloy – 40 50 Amp Silver Alloy – 50 (Tungsten Contacts Also Available) Enclosure: - No Cover Standard – No Code - Polycarbonate Protective Cover – C Din-rail - Standard Din Rail Mount Base – No Code Other Options: - Blowout Magnet – 69 (not available with a XXH contact combination) ¼" Quick Connect Terminals – Q - LED indicator – L - Coil Suppression Diode – V (VDC version only) - Auxiliary Switch – 90 * - Dual Auxiliary Switch - 91 * Coil Voltage – Class F, 155°C - VAC – 6, 12, 24, 120, 208, 220, 240, 277, 480 - VDC - 6, 12, 24, 48, 110/125, 250 (Other Coil Voltages Available Upon Request)	450 XBX 40 C 69 Q L V 90 120VAC
---	---

***NOTE: Covers cannot be used on relays with QC Terminals, Auxiliary Switches or 50A Relays with AC Coils.**


***NOTE: Covers cannot be used on relays with QC Terminals Auxiliary Switches or 50A relays with AC Coils.**




450 SERIES HEAVY DUTY POWER RELAY

OUTLINE DIMENSIONS


450BXX
(DPST - 2 FORM A)

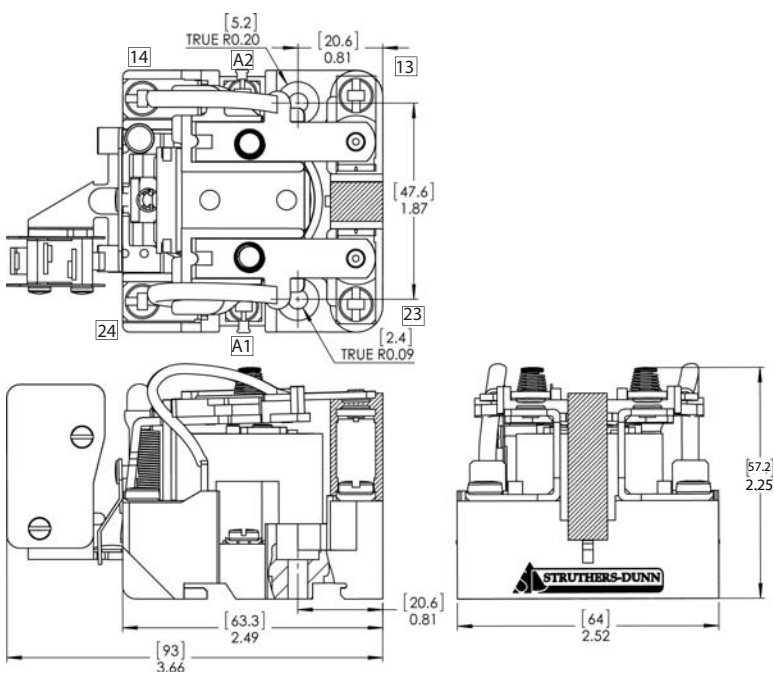


450HXX
(SPST-NO-DM - 1 FORM X)

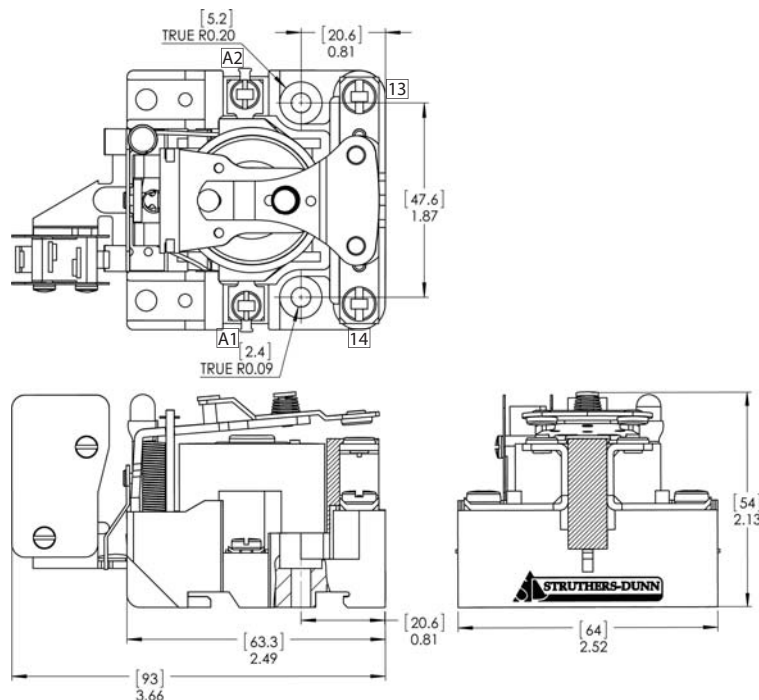

450XAX
(SPDT - 1 FORM C)

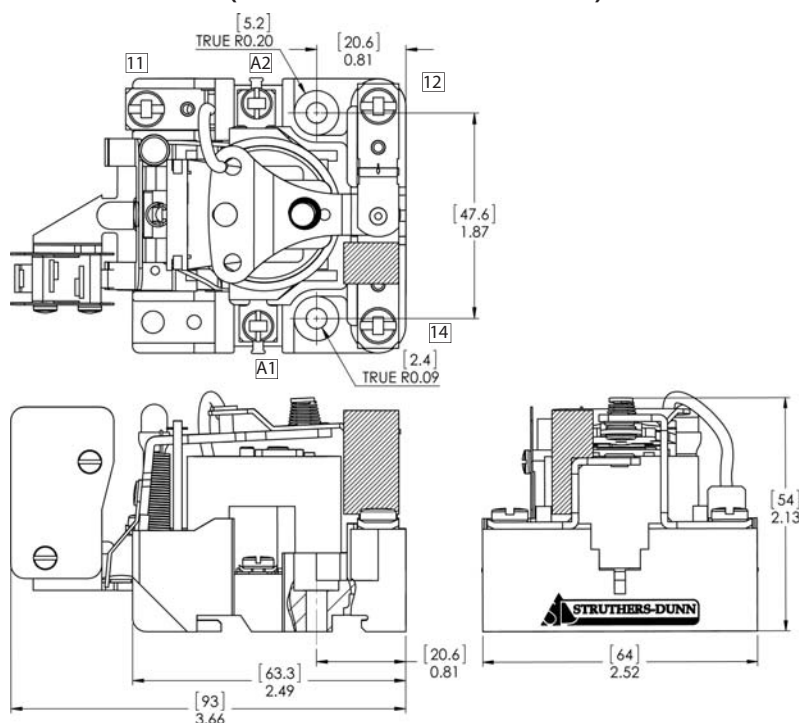

450XBX
(DPDT - 2 FORM C)

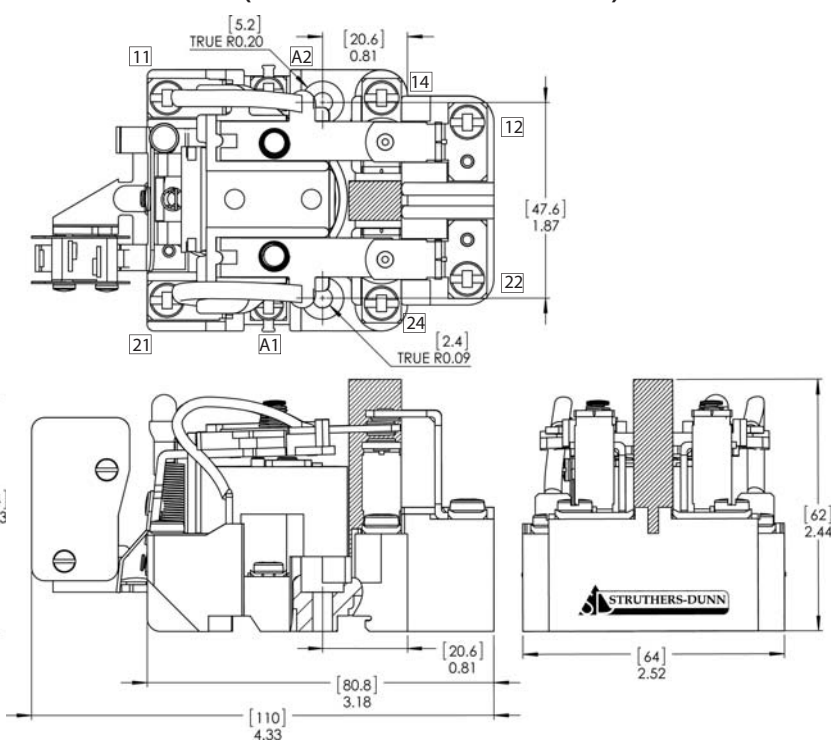

STRUTHERS-DUNN

www.struthers-dunn.com

407 E. Smith Street - Suite B • Timmonsville, SC 29161 • Phone: (843) 346-4427 • Fax: (843) 346-4465 • Email: info@struthers-dunn.com




450 SERIES HEAVY DUTY POWER RELAY


OUTLINE DIMENSIONS

450XHX

(SPDT-DM-DB - 1 FORM Z)

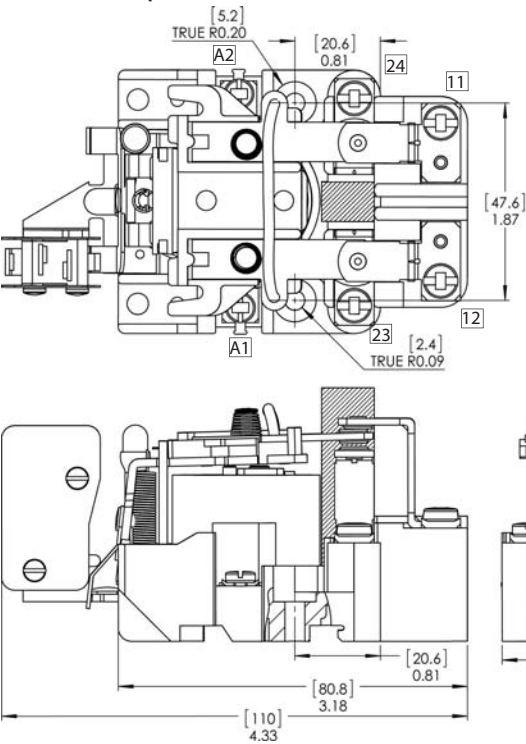


COVER - SHORT BASE
(BXX, HXX, XAX, XXH)

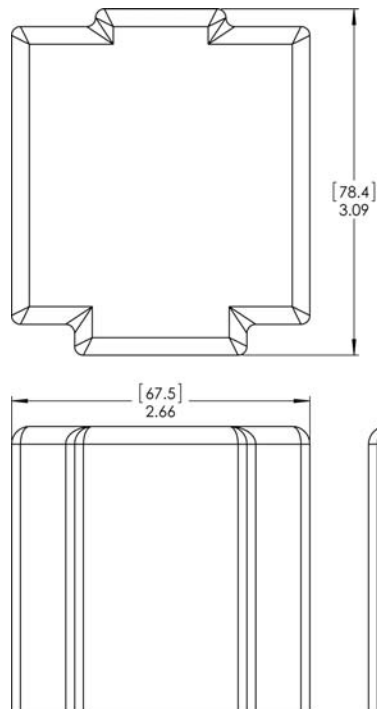


450XXH

(SPST-NC-DB - 1 FORM Y)

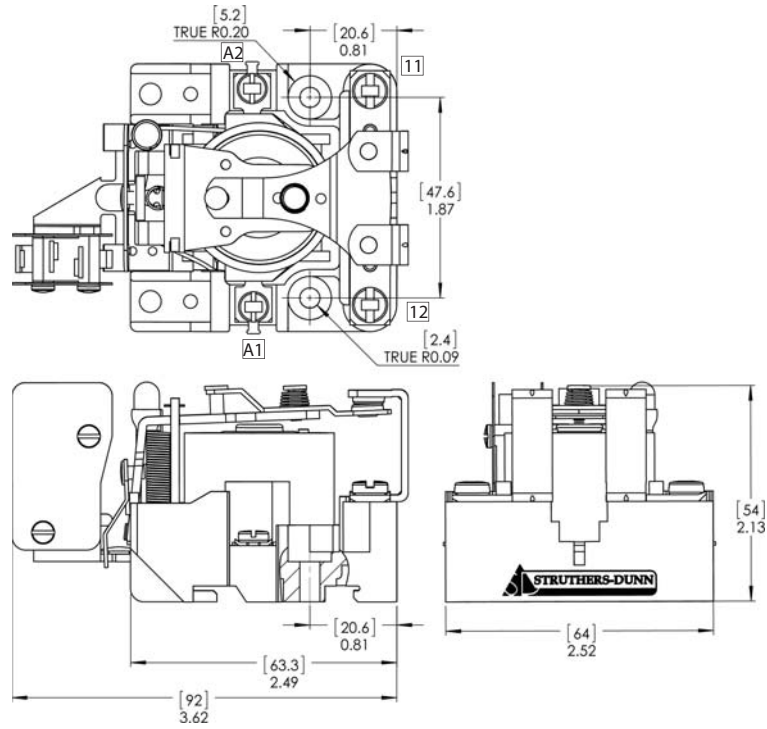

COVER - LONG BASE
(XBX, XHX)

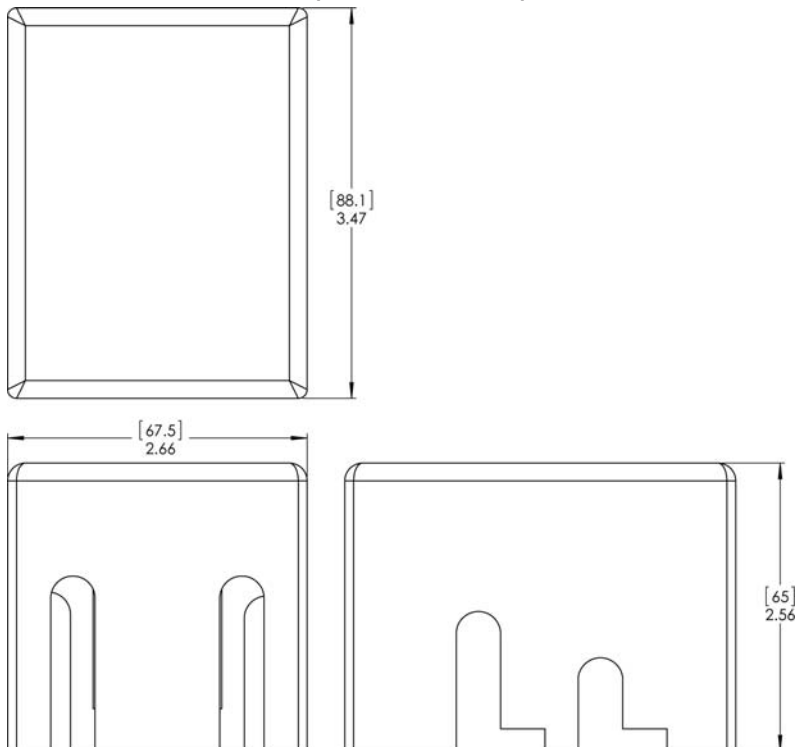

STRUTHERS-DUNN

www.struthers-dunn.com

407 E. Smith Street - Suite B • Timmonsville, SC 29161 • Phone: (843) 346-4427 • Fax: (843) 346-4465 • Email: info@struthers-dunn.com

5/1/2023



Struthers-Dunn Website



www.struthers-dunn.com